

Bold-Fast

Dome Head with Grooved Mandrel

Body Material

Steel

Aluminium

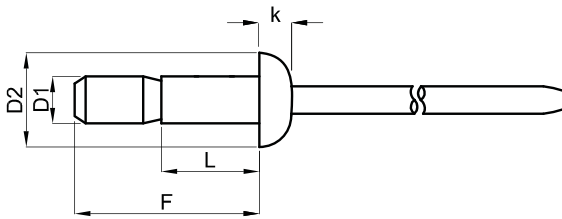
Stainless Steel (A2)

Mandrel Material

Steel




Aluminium

Stainless Steel (A2)



Ø 4,8mm




D2: 10,0
k: 2,2

	STEEL PART #	ALUMINIUM PART #	STAINLESS STEEL PART #	F max.		
4,8x10,5	RT48-105-SNS	RT48-105-ANA	RT48-105-RNR	18,5	1,6-6,9	5.000
4,8x14,5	RT48-145-SNS	RT48-145-ANA	RT48-145-RNR	25	1,6-11,0	5.000







 = 4,9 - 5,1mm

Ø 6,4mm

D2: 13,5
k: 3,0

	STEEL PART #	ALUMINIUM PART #	STAINLESS STEEL PART #	F max.		
6,4x14,5	RT64-145-SNS	RT64-145-ANA	RT64-145-RNR	25,5	2,9-9,5	2.500
6,4x20,5	RT64-205-SNS	RT64-205-ANA	RT64-205-RNR	36	2,0-15,9	2.500

 = 6,6 - 6,9mm

	STEEL		ALUMINIUM		STAINLESS STEEL	
						
Ø 4,8	5800 N	5300 N	2700 N	2200 N	5800 N	4200 N
Ø 6,4	11100 N	9800 N	5800 N	4000 N	10500 N	8000 N

Bold-Fast

Countersunk Head with Grooved Mandrel

Body Material

Steel

Aluminium

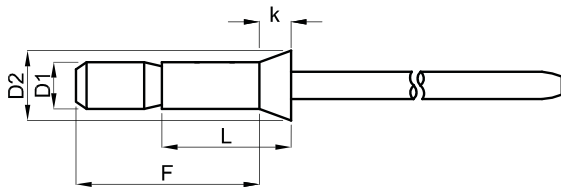
Stainless Steel (A2)

Mandrel Material

Steel

Aluminium

Stainless Steel (A2)



Ø 4,8mm

D2: 9,0
k: 2,0

D1	STEEL PART #	ALUMINIUM PART #	STAINLESS STEEL PART #	F max.		
4,8x13	RT48-130-SNS-C	RT48-130-ANA-C	RT48-130-RNR-C	20	3,2-8,4	5.000
4,8x17	RT48-170-SNS-C	RT48-170-ANA-C	RT48-170-RNR-C	24	7,7-12,7	5.000

= 4,9 - 5,1mm

Ø 6,4mm

D2: 10,5
k: 2,2

D1	STEEL PART #	ALUMINIUM PART #	STAINLESS STEEL PART #	F max.		
6,4x16,5	RT64-165-SNS-C	RT64-165-ANA-C	RT64-165-RNR-C	27	4,1-12,1	2.500
6,4x23,5	RT64-235-SNS-C	RT64-235-ANA-C	RT64-235-RNR-C	37	10,5-18,4	2.500

= 6,6 - 6,9mm

	STEEL		ALUMINIUM		STAINLESS STEEL	
Ø 4,8	5800 N	5300 N	2700 N	2200 N	5800 N	4200 N
Ø 6,4	11100 N	9800 N	5800 N	4000 N	10500 N	8000 N